Scroll down for your test

NCCER TESTING HAS GONE DIGITAL

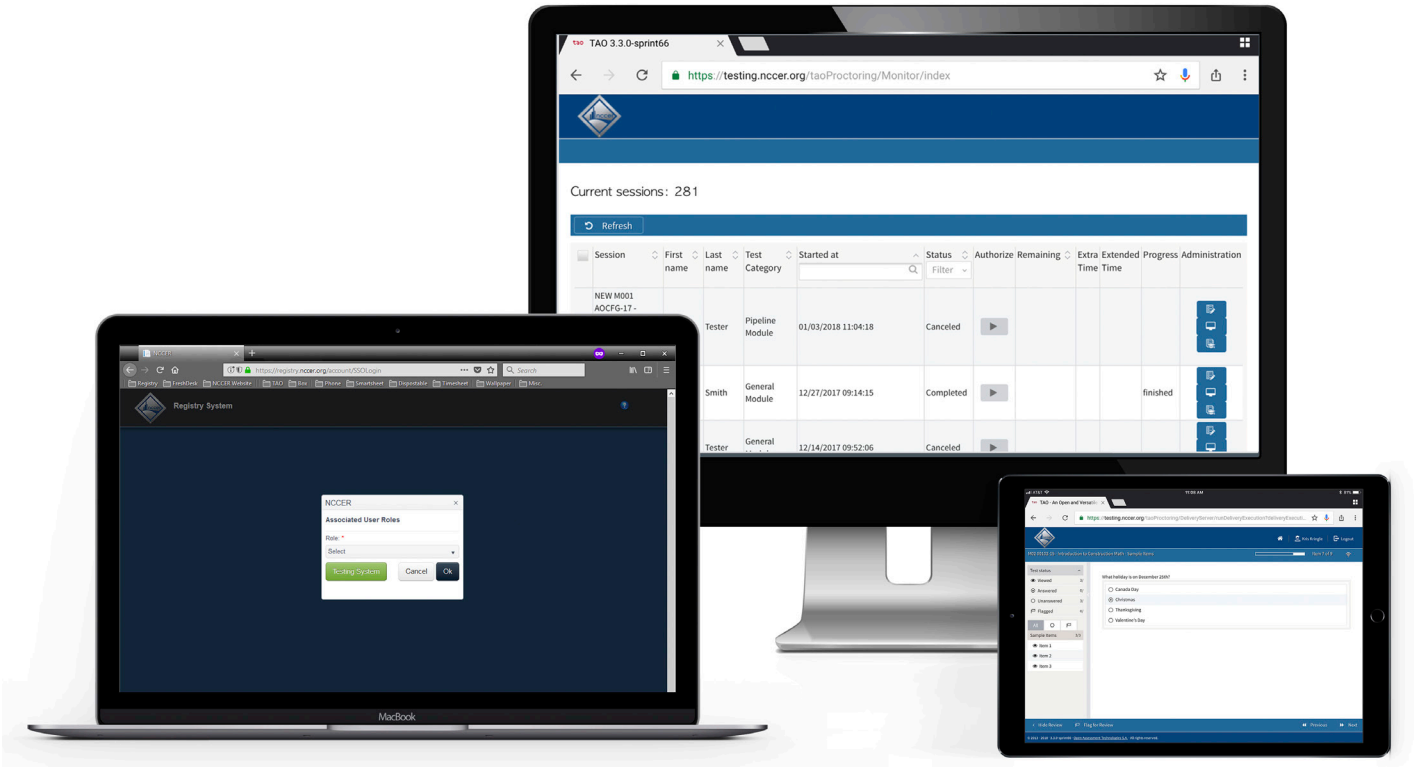

The new testing system makes module testing easier than ever.

1. **Multiple Test Versions** - Automatically scrambles test questions for you.
2. **Electronic Format** - Create, launch, score and submit module tests all online.
3. **Web-Based Platform** - No special software or hardware requirements.
4. **Proctor Station** - Administer tests easily and quickly.
5. **Responsive Design** - Automatically conforms to multiple devices (i.e. laptops, tablets, Google Chromebooks & Macbooks).

Visit nccer.org/testing to find out why you should make the switch!

1.888.622.3720

Module 19313 Exam

Jacketing Systems

Trainee Name: _____

Social Security Number: _____ Date: _____

MULTIPLE CHOICE. Choose the one alternative that best completes the statement or answers the question.

1. Which type of materials are most affected by UV light?
   a. Organic
   b. Metals
   c. Minerals
   d. Glass

2. A special image taken to detect the presence of excessive heat or high surface temperature is called a _____.
   a. chromograph
   b. micrograph
   c. thermograph
   d. heatograph

3. In food processing/preparation facilities, surfaces should be _____.
   a. horizontal and flat
   b. impervious
   c. textured
   d. protected from water

4. What feature of some prefabricated PVC fitting jacket covers can reduce costs to the manufacturer and user?
   a. Making all the covers in a single color
   b. Making all the covers in a single size
   c. Making the covers so they can stretch
   d. Making the covers with stepped ends

5. Thicker sheet jackets are mainly used for which purpose?
   a. Protective cover
   b. Vapor retarder
   c. Aesthetic cover
   d. Acoustic barrier

6. A self-healing form of laminated jacket is produced as a _____.
   a. thin polypropylene and Mylar membrane
   b. thick metalized surface with bitumen
   c.
   d. thick aluminized PVC sheet
   e. thin FSK ASJ laminate with an SSL

Copyright © 2018 NCCER. Permission is granted to reproduce this page provided that copies are for local use only and that each copy contains this notice.

7. Which factor makes removable/reusable jackets a desirable choice for installation?
   a. They can be reused, saving costs.
   b. They are inexpensive to make.
   c. They are easy to build.
   d. They are attractive when installed.

8. The two halves of a PVC fitting jacket are properly secured using _____.
   a. stainless steel staples
   b. fiber-reinforced tape
   c. welding adhesive
   d. adhesive mastic

9. Which statement identifies the main difference in the ways sheet and roll materials are installed?
   a. Sheet materials are measured and cut to size first, while roll materials are applied directly from the roll.
   b. Sheet materials are banded in place, while film membranes are glued to the insulation.
   c. Sheet materials are stapled, while roll materials are held in place by friction, like food wrap.
   d. Roll materials are taped to the insulation, while sheet materials are banded.

10. For duct jacketing, aluminum-bitumen laminates should be installed on _____.
   a. any flexible blanket or batt insulation
   b. any flat or curved insulated surface
   c. dry, clean, faced insulation
   d. unfaced fiberglass or mineral wool insulation

Copyright © 2018 NCCER. Permission is granted to reproduce this page provided that copies are for local use only and that each copy contains this notice.

Module 19313 Answer Key

Jacketing Systems

Question	Answer	Section Reference	Objective
1.	A	1.1.1	1a
2.	C	1.1.4	1a
3.	B	1.1.5	1a
4.	D	1.2.1	1b
5.	A	1.2.2	1b
6.	B	1.2.2	1b
7.	A	1.2.4	1b
8.	C	1.3.1	1c
9.	A	1.3.2	1c
10.	C	1.3.2	1c